



daltile.com/xteriors

GRACIOUS OUTDOOR LIVING

OUR HIGH-STYLE, 2CM PAVERS COMBINE ON-TREND VISUALS with unsurpassed durability. Daltile's TREAD[™] collection of pavers offers the beauty of the finest natural wood and stone looks to your outdoor living environment.

-

-



WHY PORCELAIN?

Why is porcelain the ideal material choice for new build or remodeled homes? Durability, beauty, and easy installation.


Made from only three natural ingredients – clay, sand, and feldspar – porcelain is synonymous with strength. It is resistant to scratches and abrasion, has very low water absorption (<0.5%), a high breaking strength, and it is resistant to stains, chemicals, and algae growth.

DESIGNED TO ENDURE

We strive to offer only the best design materials and solutions for your project that are easy to clean and require little maintenance.

With beautiful products and simple care, creating gorgeous outdoor spaces has never been easier.

TREEAD PAVERS

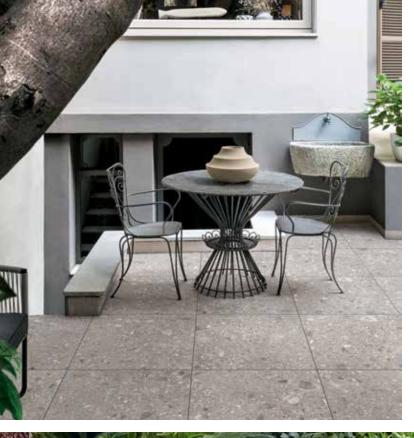



STONE ATTACHÉ[®] OFFERS AN EXTENSIVE COLLECTION of elegant stone looks in wide range of modern and contemporary sizes and colors to match any theme. Featuring multiple grey color options plus black, white and taupe, the authentic stone graining and marblelike veining makes for distinctive design suited for the outdoors.

FLOOR STONE ATTACHÉ[™]

STONE LOOK

COLORBODY[™] PORCELAIN PAVERS




DELEGATE[™] - AVAILABLE IN 20 x 40



LIGHT GREY DL26

AMBASSADOR[™] - AVAILABLE IN 16 x 48








ASSEMBLE[™] - AVAILABLE IN 32 x 32







EMISSARY AS12

DARK GREY DL27

LIGHT GREY DP01

DIGNITARY[™] - AVAILABLE IN 24 x 24





DARK GREY DP03

SUPERIOR TAUPE DR08

Photo features Assemble[™], Dignitary[™] and Ambassador[™] pavers.

AVAILABLE IN 24 x 24 & 20 x 40





sizes, 24 x 24 and 16 x 48, this outdoor porcelain allows various design possibilities to come alive.

States of the states of the states

hand have been an and

in the area is a second of the second of the

and the state of t

and supplier of the site of a site and a sector

SALE TIME LINKS

and in Martin

A CHARLEN AND

FLOOR COMMISSARY[™] COLORBODY[™] PORCELAIN PAVERS

WOOD LOOK



FINISHES: TEXTURED

COLOR PALETTE









DEPUTY GREY



PROXY GREY



BUREAU BROWN

16 x 48 PAVER TILE



DEPUTY GREY CS30



PROXY GREY CS31



BUREAU BROWN CS33



REGENT HONEY CS34



COMMANDER BEIGE CS32

24 x 24 PAVER TILE





REGENT HONEY CS34

DEPUTY GREY CS30





TIMELESS STYLE. SUPERIOR DURABILITY.

See how 2CM Porcelain Pavers stack up against other products on the market.

	Porcelain Pavers	Clay Brick Pavers	Cast in Place Concrete Concrete Pavers		Natural Stone	
STAIN RESISTANCE	HIGH	Medium	Low	Low	Low	
UV RESISTANCE	WILL NOT FADE	High	Low	Low	High	
SCRATCH RESISTANCE	HIGH	Medium	Low	Low	Low	
FREEZE THAW RESISTANCE	FREEZE THAW PROOF	Medium	Low	Low	Low	
DE-ICING SALT RESISTANCE	HIGH	Medium	Low	Low	Low	
ACID RESISTANCE	HIGH	Low	Low	Low	Low	
WATER ABSORPTION (ASTM #373)	< 0.5%	< 8%	< 10%	< 5%	< 5%	
SEALING	NEVER	No	Recommended	Recommended	Recommended	
COMPRESSIVE STRENGTH (PSI)	>30,000	>8,000	>2,500 (residential) >4,000 (commercial)	>8,000	1,800–19,000 (depending on stone)	
WEIGHT (LBS/SF)	9	21 – 31	12.5	27 – 36	15 – 50 (depending on stone)	



SIZES

		Thickness	Sq. Ft./ Carton	Pieces/ Carton
32 x 32 Paver Tile	(31-5/16" x 31-5/16") (79.50 cm x 79.50 cm)	13/16″ (2cm)	6.89	1
24 x 24 Paver Tile	(23-7/16" x 23-7/16") (59.50 cm x 59.50 cm)	13/16" (2cm)	7.76	2
20 x 40 Paver Tile	(19-1/2″ x 39-3/16″) (49.50 cm x 99.50 cm)	13/16″ (2cm)	5.38	1
16 x 48 Paver Tile	(15-9/16" x 47") (39.6 cm x 119.5 cm)	13/16" (2cm)	5.16	1

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	~
Wet & Level – Interior Floor	≥ 0.42	~
Shower Floors (Residential or Light Commercial)	≥ 0.42	~
Exterior Floor Applications (including pool decking & other wet areas with minimal footwear)	≥ 0.60	\checkmark
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	\checkmark
Countertops	N/A	~
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest[™], visit daltile.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications in freezing and non-freezing climates, when proper installation methods are followed.

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

For additional information refer to "Factors to Consider" at: daltile.com/Factors.

Random visuals enhance the natural beauty of this product. To achieve optimal results, all tile should be selected from multiple cartons and shading and graphic arrangement planned prior to installation.

INSTALLATION

The gaps between the slabs should be chosen depending on the overall desired aesthetic.
Gaps of at least 3/16" (5 mm) should be left between slabs, using spacers to set the correct width. Joint may be left empty or filled with fine sand, polymeric sand specifically formulated for porcelain tile or small, clean aggregate, depending on the joint width and desired aesthetic.
The gaps between the slabs should be chosen depending on the overall desired aesthetic.
Slabs must be laid with open joints of variable width of no less than 3/16" (5 mm).
Pedestal contains correct tile spacers for application.

Visit daltile.com/xteriors for in-depth instructions, specifications and support details.

SHADE VARIATION

CS30, CS34	Medium (V2) - Color Variation
DP01, DP03	within each Tile
CS32	High (V3) - Some Variation from
DL26, DL27	Tile to Tile, and within each Tile
CS31, CS33 AM33, AM34 AS10, AS11, AS12 DR07, DR08, DR09	Random (V4) - Considerable Variation from Tile to Tile

PERFORMANCE CHARACTERISTICS

	ASTM#	Paver Result
Water Absorption	C373	< 0.5%
Breaking Strength	C648	> 1000 lbs
Scratch Hardness	MOHS	8.0
Chemical Resistance	C650	Resistant
Abrasion Resistance	C1027	N/A

For addition on test results, visit us at: daltile.com/information/TestResults.

ZEROT®X


Healthy Homes | Healthy Planet






All or select items within this series meet the requirements for these qualifications. For more information, visit daltile.com.

FINISH YOUR LOOK WITH AVAILABLE TRIM SHAPES.



RECTIFIED STEP TILE

The coping tile finishes steps, tops of walls and similar features. It has a nondrip edge at the bottom to interrupt the flow of water, directing it straight onto the ground to protect the structure.




RECTIFIED L-EDGING

The versatile L-edging tile is ideal for the edges of paths, pools and other design features.

RECTIFIED GUTTER

The gutter tile with internal patterning is used underneath grid tiles to collect drain water.



RECTIFIED L-KERB

The L-kerb tile can be used to

enclose and complete the edges of

paths and other design features.

RECTIFIED GRID

Run-off or overflow water passes through the grid tile for collection.

* Trim items available in many sizes and colors. Consult with your sales representative and/or design team for specifics.



'ERTICA ALL COMPLEMENT

AMBASSADOR[™] - RANDOM LINEAR MOSAIC





JET SETTER DUSK AM34

DIPLOMACY[™] - BRICK-JOINT MOSAIC

VOYAGER BLACK AM33

DIGNITARY[™] - ABSTRACT MOSAIC



LIGHT GREY DL26

SUPERIOR TAUPE DR08

ASSEMBLE[™] - 2 x 2 MOSAIC

DARK GREY DL27





MAGISTRATE AS11

EMISSARY AS12

BRICKWORK[™] - 2 x 8 QUARRY TILE

STACKED STONE - QUARTZITE



-

ALCOVE BW04

SANYA WHITE S702 6" x 24" Stacked Stone

6H x 8L/ 6H x 15-1/2L Stacked Stone Corner

12-24

Natural Cleft Ungauged

LIGHT GREY DP01

1.04

15 - Carl ATRIUM BW02

TERRACE BW05

DARK GREY DP03

PATIO BW03



CORRIDOR BW06

BRICKWORK[™] - 4 x 8 QUARRY TILE

DELEGATE[™] - RANDOM LINEAR MOSAIC







SANDSTONE*




EASTERN SAND S319 6" x 24" Stacked Stone Natural Cleft Ungauged





DYNASTY MOUNTAIN S318 6" x 24" Stacked Stone Natural Cleft Ungauged







Natural Cleft Ungauged

Stacked Stone Corner



HAIKOU GREY S703 6" x 24" Stacked Stone Natural Cleft Ungauged



6H x 8L/ 6H x 15-1/2L Stacked Stone Corner



BEIJING GREEN S282 6" x 24" Stacked Stone Natural Cleft Ungauged



6H x 8L/ 6H x 15-1/2L Stacked Stone Corner 6H x 8L/ 6H x 15-1/2L Stacked Stone Corner



6H x 8L/ 6H x 15-1/2L Stacked Stone Corner



ALCOVE BW04

STUDIO BW01



TIBETAN SLATE S317 6" x 24" Stacked Stone



6H x 8L/ 6H x 15-1/2L Stacked Stone Corner

TERRACE BW05 STACKED STONE -







PATIO BW03





MACAU BLACK S701 6" x 24" Stacked Stone Natural Cleft Ungauged



6H x 8L/ 6H x 15-1/2L Stacked Stone Corner







OUR COLLECTION OF OUTDOOR TILE FOR VERTICAL SURFACES is the perfect place to start for stand-out design on outdoor feature walls, fireplaces, pools, and more.

13

WHY PORCELAIN ROOFING?



More than seven decades of experience working with tile, we understand the value of durability



We know the materials that can withstand extreme wear and tear

We know luxury and longevity - two qualities every roof should have



Comprehensive expertise resulting in roofing tiles with timeless beauty and everlasting quality - all while being affordable and easy to install

- Resistant to Frost
- 🕪 High Breaking Strength
- () Impervious to Water
- 🔄 110 mph Wind Rating
- (👌 Class A Fire Rating (Fire Resistant)*
- 💮 Class IV Hail Impact Rating*

- D Lifetime Limited Warranty
- (Qg) Walkable
- Made In The U.S.A.^{*}
- Fast & Easy Installation
 - 🖉 Low Overall Weight⁺



CLASSIC TIMBER



NORDIC TIMBER PR40




MYSTIC TIMBER PR41

LAVISH CLAY




ADOBE CLAY PR44


OPULENT SLATE



IMPRESSIONIST GREY SLATE PR42



ONYX SLATE PR45



ANTIQUE SLATE PR43

ROOF TILE - SIZES

	Nominal Size	Actual Size	Thickness	Pieces/ Square	Weight/ Square	Pieces/ Carton	Carton/ Pallet
STANDARD	11 x 22 Roof Tile	(11-1/4" x 22-1/2") (28.60 cm x 57.20 cm)	(8-9mm)	77	535.00 Lbs.	10	32
HD	11 x 22 Roof Tile	(11-1/4" x 22-1/2") (28.60 cm x 57.20 cm)	(12-13mm)	77	743.00 Lbs.	7	32

PANORAMIC

porcelain surfaces"

Surfaces Like You've Never Seen Them Before

If you've ever dreamt of using natural stone slabs in places they should never be used, Panoramic can help you make those dreams come true.

SUITABLE FOR EXTERIOR:

- COUNTERTOPS
- CLADDING



Photo features Elemental Selection Titanium Grey matte on the wall.





STATUARIO CM03



AMOND MINE CM12









NEW! JASPER GREY CM81*



SLAB



ONYX GALAXY CM14 * 6 mm – Available in matte finish only | * Available in glossy



MARFIL CM06

MOONSTONE CM11

TITANIUM GREY CM13

17



INDUSTRIAL SELECTION

Photo features Industrial Selection Manor White matte slab on the fireplace and countertops.



BELMONT TERRACE CM07



VICKERY TAUPE CM10



STONEWALL COAL CM09



HEARTH SMOKE CM08



MANOR WHITE CM18*



CHARRED NICKEL CM16

METALLIC SELECTION

Photo features Metallic Selection Chromium matte on the wall.



CHROMIUM CM19





Visit Daltile.com/xteriors for more details and information.

Υ,