


OUTDOOR LIGHTING

MINI BOOK

OF IN-LITE

in-lite

ACE COLLECTION

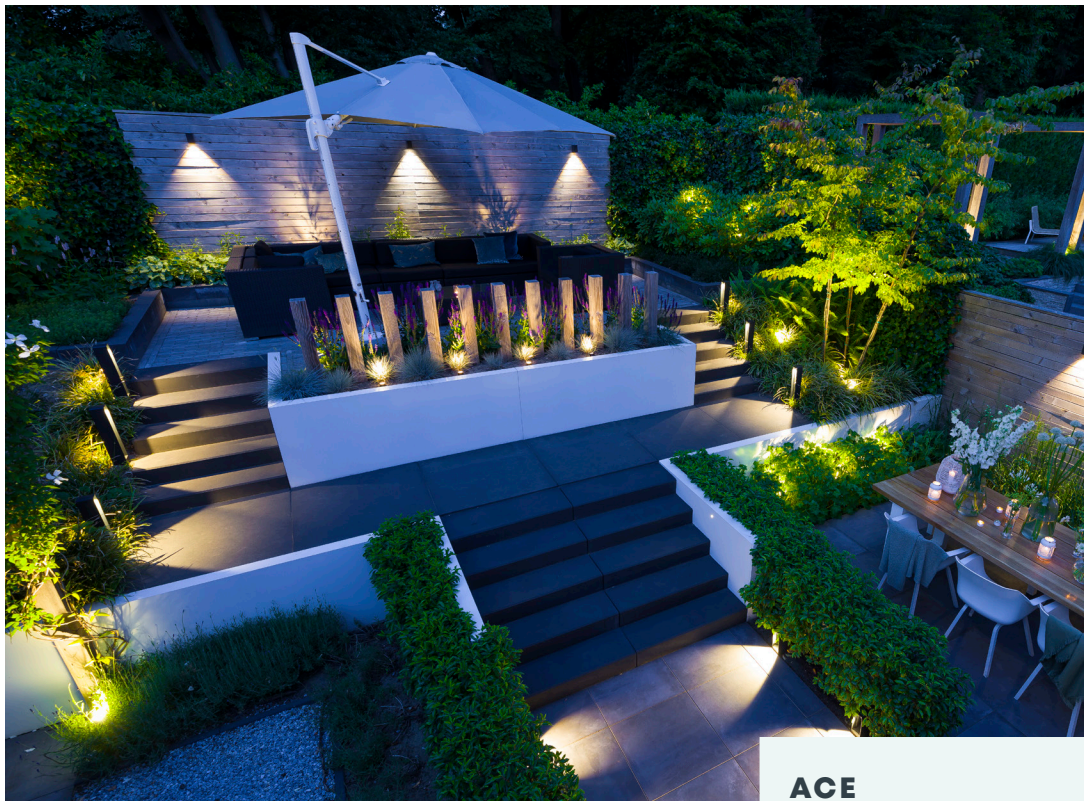

ACE

ACE is one of the most complete concepts in our product range. It offers bollards and wall lights in five different colors. This modern and simplistic concept is perfect for any outdoor space. It has a minimalistic design and a unique sleek lighting effect.

ACE DOWN DARK



ACE UP-DOWN DARK



WINK



SHUTTER




LENS



Customize the fixtures in the ACE series with in-lite accessories that are specially designed to play with light.

- **WINK** for the ACE bollard lights
- **SHUTTER 1 & SHUTTER 2** for the ACE wall
- **LENS CLEAR & LENS DIFFUSE** for all ACE fixtures

EVO COLLECTION

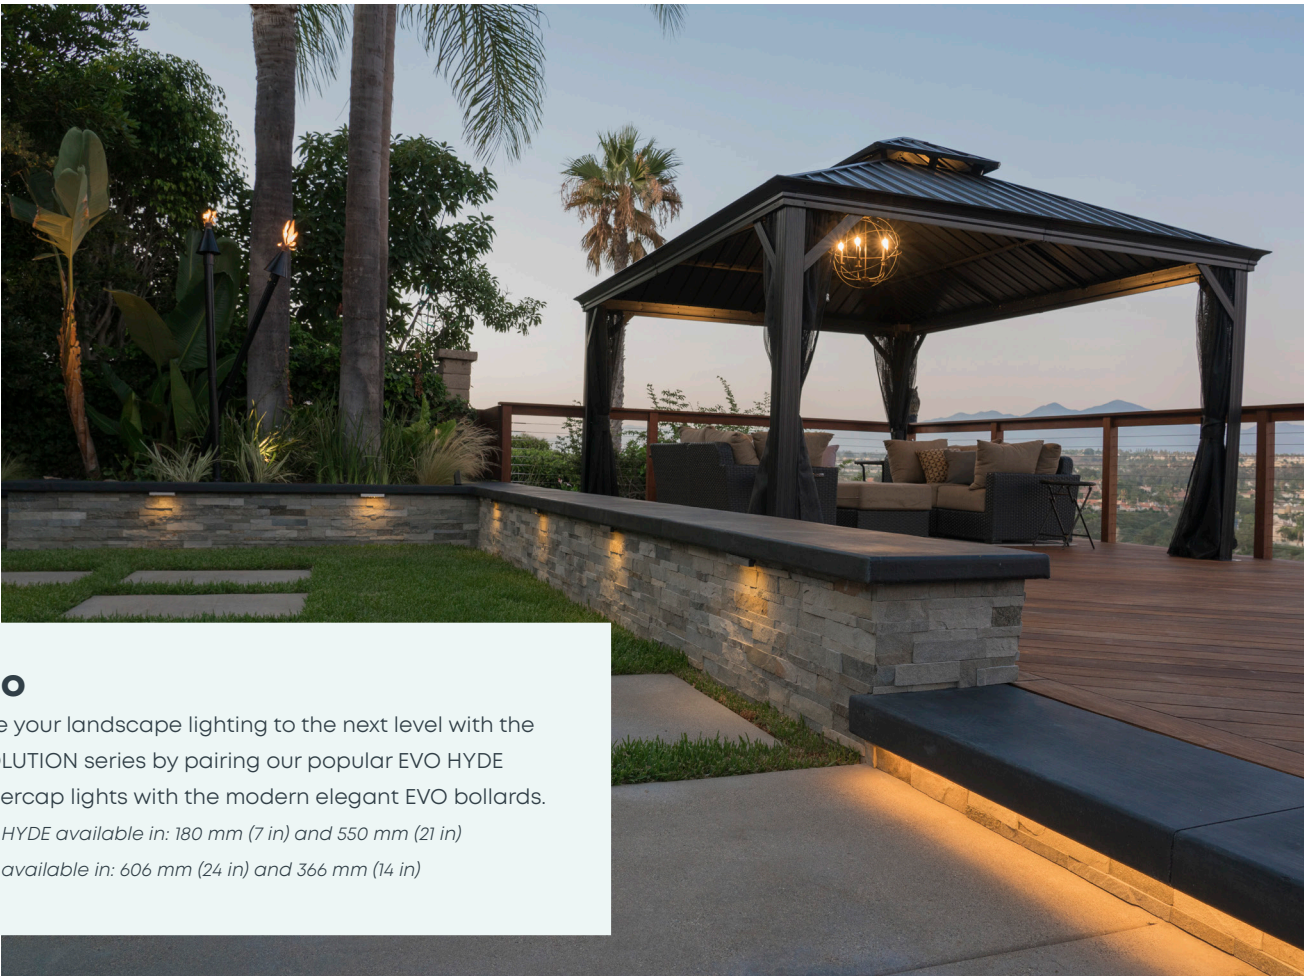

EVO

Take your landscape lighting to the next level with the EVOLUTION series by pairing our popular EVO HYDE undercap lights with the modern elegant EVO bollards. *EVO HYDE available in: 180 mm (7 in) and 550 mm (21 in)*
EVO available in: 606 mm (24 in) and 366 mm (14 in)



EVO HYDE 550 DARK



EVO HYDE 180 DARK



RECESSED LIGHTS



Scan for
the full
brochure

FUSION

FUSION is the softest light from in-lite. Want something truly unique? Combine the various sizes to create your own "starry night" effect. FUSION is fitted with a diffuse lens to ensure that the light does not glare.
Available in: 60 mm (2 3/8 in) and 22mm (7/8 in)



FUSION



FUSION 22 DARK




FUSION 22 RVS



FUSION 22

HYVE

The HYVE series produces an eye-catching yet inviting lighting effect. The honeycomb lens makes the light sparkling and bright, but not blinding. These lights are perfect for paths, decks and driveways.
Available in: 60 mm (2 3/8 in) and 22mm (7/8 in)

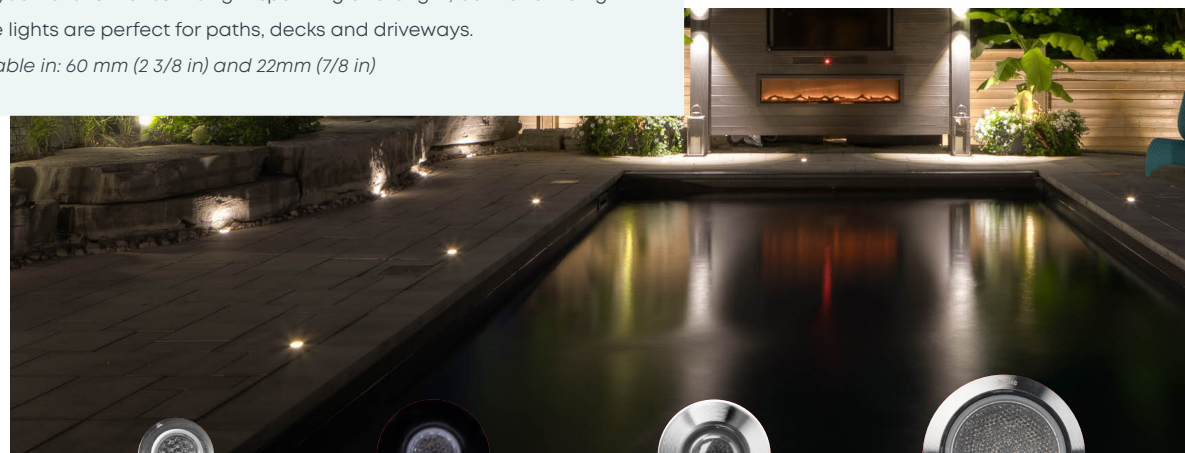

HYVE 22



HYVE 22 DARK




HYVE 22 RVS



HYVE

PUCK

PUCK lights produce a subtle, 360 degree diffused light. This fixture is available in two sizes and is perfect as indication lighting along a driveway, pathway, deck or dock. Although the fixture sits slightly above grade, it is safe to walk and drive over.
Available in: 60 mm (2 3/8 in) and 22mm (7/8 in)

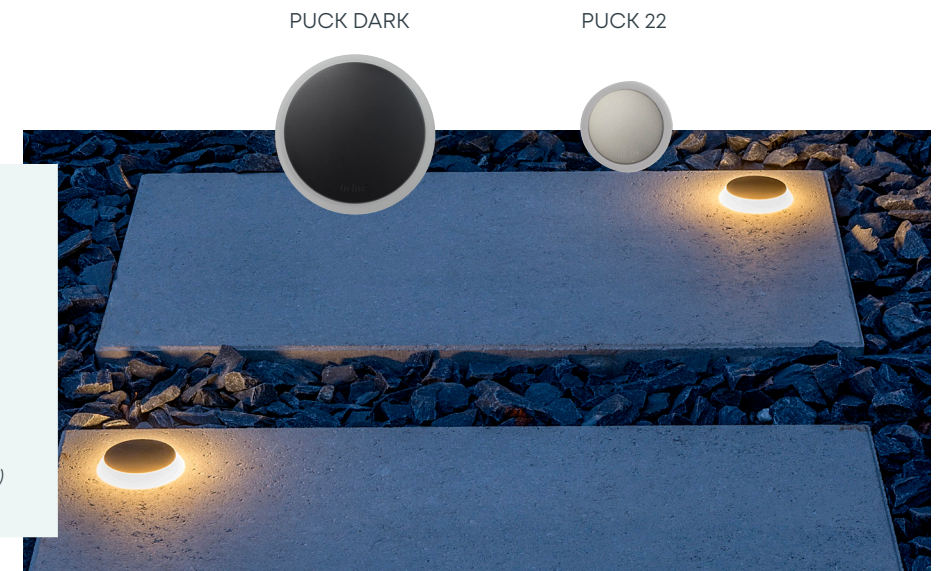

PUCK DARK

PUCK 22

LUNA DARK



LUNA

LUNA (Light Under 'N Angle) is ideal for illuminating elements like walls, bushes, facades, fences and more. It's recessed profile is safe to walk, drive, and use a lawnmower over, making it a perfect option for illuminating objects from the ground up in a practical and beautiful way.
Available in: 60 mm (2 3/8 in)



NERO

BIG NERO

BIG NERO NARROW



INSTALL RECESSED FIXTURES IN GRAVEL OR GRASS

Use the SPIKE or SPIKE 22 accessory with 60 mm or 22 mm fixtures to illuminate paths, shrubs, fences, plants, & more from the ground up.

NERO

The NERO series are powerful well lights that illuminate the largest trees with ease. These fixtures are safe to walk on and drive a lawn mower over. The BIG NERO fixtures, available in two models, feature the ability to easily adjust the angle of the light from the outside (see page 10 for more information).

WALLLIGHTS




HALO DOWN DARK

Ideal for:
Fences
Privacy screens
Pergolas



MINI WEDGE DARK

Ideal for:
Deck posts
Stone pillars
Deck skirting



WEDGE SLIM DARK

Ideal for:
Outdoor kitchens
Privacy screens
Stone pillars



BLINK DARK

Ideal for:
Fences
Walls
Privacy screens



MINI-SCOPE

Light reach: 3 m (9 ft)
Ideal for:
Small trees
Plants



SCOPE

Light reach: 8 m (11.5 ft)
Ideal for:
Medium trees
Accent features





BIG SCOPE WIDE

Light reach: 6.5 m (20 ft)
Ideal for:
Wide trees
Accent features



BIG SCOPE NARROW

Light reach: 14 m (46 ft)
Ideal for:
Narrow trees
Accent features

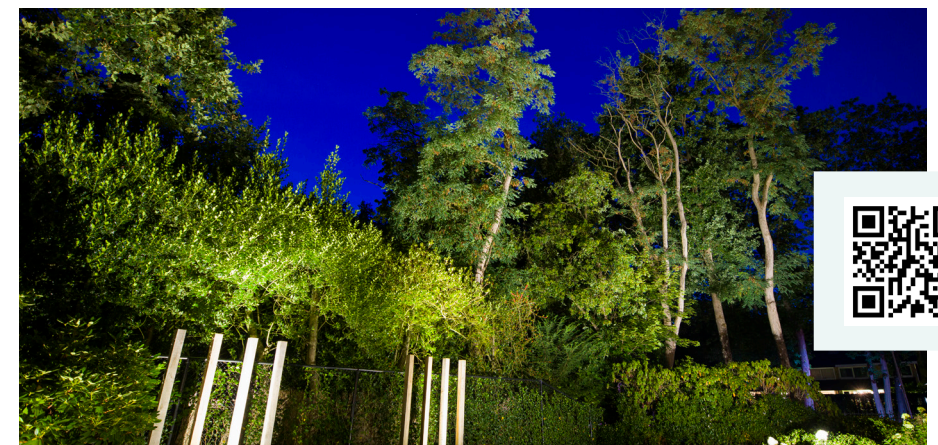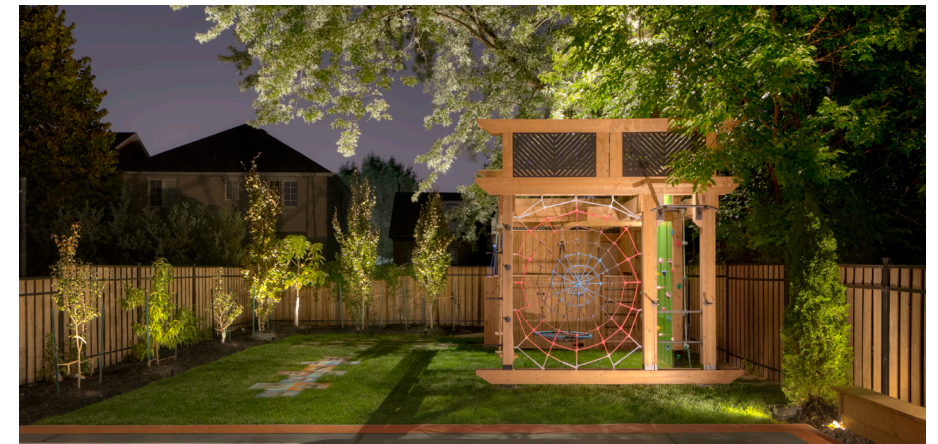

SPOTLIGHTS

View all
in-lite
wall lights



View the
product
advisor

BOLLARD LIGHTS

Scan for
the full
brochure



HUB-50
Transformer suitable for 50 VA installation value. The HUB-50 is operated with a touch screen and comes with a light sensor. MOVE (wired motion detector) sold separately.



HUB-100
Transformer suitable for 100 VA installation value. The HUB-100 is operated with a touch screen and comes with a light sensor. MOVE (wired motion detector) sold separately.



SMART HUB-150
Transformer suitable for 150 VA installation value. Control the SMART HUB-150 with the in-lite app. Wireless motion detector (SMART MOVE) sold separately.



IN-LITE SMART
Nowadays, everything is controlled via apps and your outdoor lighting system shouldn't be any different. That's why we've taken the first steps to operate the in-lite outdoor lighting system via the in-lite app. Our technology is always advancing and improving, designed to provide the optimal experience for our users. Please refer to page 9 for more information about in-lite smart products and features.

CHOOSE YOUR TRANSFORMER


Choosing the right transformer is critical. Most importantly, you need to have enough capacity on your system to hold all your fixtures. But you also want to be able to choose your personal preferences, like the operation. The differences are shown in the diagram here.

	HUB-50	HUB-100	SMART HUB-150
Maximum Capacity	50 VA	100 VA	150 VA
Control by	touch screen	touch screen	in-lite app
Number of connection ports	2 lines	2 lines	3 lines
Individual zone control	✗	✗	✓
Manual on/off	✓	✓	✓ (in-lite app)
Dusk til' dawn settings	✓ (light sensor)	✓ (light sensor)	✓ (astronomical clock)
Timer function	✓	✓	✓
Motion sensor	MOVE (wired)	MOVE (wired)	SMART MOVE (wireless)
Overload & short circuit indicators	✓	✓	✓
Outdoor installation of PROTECTOR	✓	✓	✓

IN-LITE INNOVATION

in-lite products meet high-quality expectations and go above and beyond industry standards. We know that outdoor lighting is subject to extreme conditions so our products are made of high-quality aluminum which we finish with the best possible coating or anodic oxidation. This ensures good color consistency and prevents corrosion. Our fixtures are built to survive harsh weather conditions and are designed to last.

We also work exclusively with the best LED suppliers. This is why our lights consume very little energy and why all our LEDs have a CRI of 90+. Our mission is to produce high quality fixtures with high quality light output: giving all colors in your outdoor space a fully natural feel. We aim to create the best outdoor lighting experience.

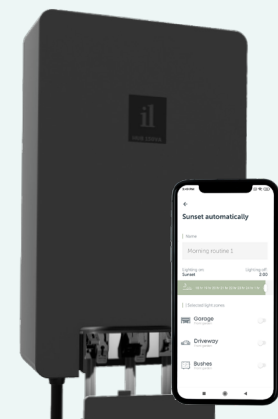

IN-LITE SMART

Nowadays, everything is controlled via apps and your outdoor lighting system shouldn't be any different. That's why we've taken the first steps to operate the in-lite outdoor lighting system via the in-lite app. Our technology is always advancing and improving, designed to provide the optimal experience for our users. Check out the next page to learn more about in-lite's innovative SMART technology.



IN-LITE MOTION

in-lite motion is one of the most innovative features in an in-lite fixture. It is a revolutionary technology by which the light source from the BIG NERO and the BIG NERO NARROW can be tilted without having to disassemble the fixture. The direction of the light can be easily adjusted using the magnetic system on the in-lite logo and can produce the ideal lighting effect. The fixture is guaranteed to remain waterproof.

ONE WITH NATURE

Innovation and design are closely connected. With the SWAY series, we wanted to develop a fixture that can be naturally integrated into your outdoor space. The minimalistic design ensures that it is in complete harmony with nature. In order to add this natural element to the fixture, we went for flexible materials. This way, the fixture is able to move, or "sway," with the wind and generate different shadows in the space. After extensive testing, we found the perfect materials to make SWAY 100% One with Nature.



IN-LITE SMART



SMART HUB PROTECTOR

The SMART HUB PROTECTOR has been introduced to further protect the in- lite SMART HUB-150 transformer. This accessory extends the life of the product in harsh weather conditions if it is not possible to install the SMART HUB-150 in a covered area.

SMART MOVE

Just like the SMART HUB-150, the wireless SMART MOVE can be controlled using the in-lite app through a Bluetooth connection. Once movement is detected, the light can be set variably to stay on from 1 to 60 minutes using the in-lite app. The SMART MOVE is solar powered and should be installed in direct sunlight.



SMART EXTENDER

The SMART EXTENDER was developed to strengthen the Bluetooth connection in and around your home. Sometimes external factors like thick, insulated walls and steel constructions can reduce Bluetooth signal strength and quality. In these cases, the SMART EXTENDER ensures an optimal connection. Simply plug the SMART EXTENDER into an outlet in your home to strengthen the connection from your smart device to your transformer.



IN-LITE APP

The introduction of the SMART HUB-150 to the in-lite product portfolio means the beginning of a new era in which outdoor lighting is fully integrated into our lives. The app for the SMART HUB-150 has been developed for iOS and Android smartphones and allows you to set up and save all features of the SMART HUB-150, and to share them with other users of the in-lite app. Download the app and discover the world of SMART.



IN-LITE SYSTEM

HUB-50 & HUB-100

The HUB (or transformer) controls all the lighting in the outdoor space. The system is designed to convert the 120V line voltage from a house into 12V to power your fixtures. The HUB-50 & HUB-100 are in-lite's basic transformers featuring a touch screen, two cable ports (controlled simultaneously), and various settings such as Dusk 'till Dawn.

CABLE

The 12V cable is rolled out from the transformer and guided along the fixtures. There are two types available: 14/2 cable and 12/2 cable. With the 14/2 cable, the cable length between the transformer and the cable end may be no longer than 40 meters (132 ft), while the 12/2 cable can handle up to 80 meters (262 ft).

CABLE SPLIT (CC-2)

Want to split your cable? Use a CC-2 connector to split your cable in no time. Please note that a split counts in the maximum cable length between the transformer and the fixture.

EASY-LOCK

The EASY-LOCK is in-lite's patented connection system. It comes complete with every fixture and makes installation a breeze.

CABLE END

The cable can end anywhere in the yard and does not need to form a closed system. Cable caps can be placed on the cable ends for a tidy finish and to prevent moisture penetration. These are available in two sizes for different cables.

SMART HUB-150

The SMART HUB is the most innovative transformer in our product range and it can be operated using the in-lite app and a Bluetooth Low-Energy connection. Install the transformer and the lighting, download the in-lite app and personalize your lighting experience in no time. With the SMART HUB-150, you are able to control each cable port individually. This allows you to create different lighting zones in your outdoor space, where lights can be switched on and off at different times. Use routines to customize the timing of each zone or control them all at once using the in-lite app.

Maximum Cable Length
14/2 cable = 40m (132 ft)
12/2 cable = 80m (263 ft)

ACCESSORIES

Is the cable connected to an in-lite fixture too short? Extend it with an EXTENSION cord. The SPLITTER can also be used to connect two fixtures to one EASY-LOCK.

Scan to see the full
digital brochure



TECH SPECS

LEGEND

USE - The fixture is suitable for illuminating the following landscape elements:

PATH

TREE

GARDEN

TALL HEDGE

ACCESSORY AVAILABLE

DECK

FENCE/WALL

STAIRS

DRIVEWAY

HOUSE

PRIVACY SCREEN

PERGOLA

RETAINING WALL

COLOR - The fixture is available in the following colors:

CORTEN

DARK GREY

ROSE SILVER

WHITE

BLACK

PEARL GREY

STAINLESS STEEL

RECESSED LIGHTS

FUSION 22

12V / 0.2 W / 0.2 VA / 2750K / CRI 93

Ø 22 mm / 7/8 in

FUSION 22 DARK

12V / 0.2 W / 0.2 VA / 2750K / CRI 94

Ø 22 mm / 7/8 in

FUSION 22 RVS

12V / 0.2 W / 0.2 VA / 2750K / CRI 94

Ø 22 mm / 7/8 in

FUSION

12V / 0.9 W / 1.0 VA / 2750K / CRI 93

Ø 60 mm / 2 3/8 in

HYVE 22

12V / 0.2 W / 0.2 VA / 3000K / CRI 93

Ø 22 mm / 7/8 in

HYVE 22 RVS

12V / 0.2 W / 0.2 VA / 3000K / CRI 95

Ø 22 mm / 7/8 in

HYVE 22 DARK

12V / 0.2 W / 0.2 VA / 3000K / CRI 95

Ø 22 mm / 7/8 in

HYVE

12V / 0.8 W / 0.8 VA / 3000K / CRI 95

Ø 60 mm / 2 3/8 in

LUNA

12V / 3.0 W / 5.0 VA / 3100K / CRI 94

Ø 60 mm / 2 3/8 in

PUCK 22

12V / 0.6 W / 0.6 VA / 2900K / CRI 96

Ø 22 mm / 7/8 in

PUCK

12V / 1.5 W / 2.5 VA / 2900 K / CRI 96

Ø 60 mm / 2 3/8 in

NERO

12V / 3.0 W / 4.7 VA / 3100 K / CRI 91

Ø 130 mm / 5 in

BIG NERO

12V / 7.5 W / 11.9 VA / 3100 K / CRI 90

Ø 170 mm / 6.5 in

Featuring in-lite Motion

BIG NERO NARROW

12V / 7.5 W / 11.9 VA / 3100 K / CRI 91

Ø 170 mm / 6.5 in

Featuring in-lite Motion

SPOTLIGHTS

MINI SCOPE

12V / 1.0 W / 2.0 VA / 2900K / CRI 93

Light reach: 3 m / 9 ft

SCOPE

12V / 3.0 W / 5.2 VA / 3100K / CRI 91

Light reach: 8 m / 11.5 ft

BIG SCOPE WIDE

12V / 5.0 W / 8.0 VA / 3100K / CRI 91

Light reach: 6.5 m / 20 ft

BIG SCOPE NARROW

12V / 5.0 W / 8.0 VA / 3100K / CRI 92

Light reach: 14 m / 46 ft

PATH LIGHTS

ACE HIGH

12V / 3.0 W / 5.3 VA / 3000K / CRI 94

78 mm x 86 mm x 490 mm (LxWxH)

3.0 in x 3.3 in x 19.2 in (LxWxH)

ACE

12V / 3.0 W / 5.3 VA / 3000K / CRI 91

78 mm x 86 mm x 205 mm (LxWxH)

3.0 in x 3.3 in x 8.0 in (LxWxH)

EVO

12V / 2.0 W / 2.1 VA / 3000K / CRI 95

120 mm x 50 mm x 606 mm (LxWxH)

1.9 in x 4.7 in x 23.8 in (LxWxH)

EVO LOW

12V / 2.0 W / 2.1 VA / 3000K / CRI 95

120 mm x 50 mm x 366 mm (LxWxH)

1.9 in x 4.7 in x 14.4 in (LxWxH)

SWAY

12V / 1.0 W / 1.0 VA / 2900K / CRI 95

H: 1000 mm / 40 in

Ø 85 mm / 3.3 in

SWAY LOW

12V / 1.0 W / 1.0 VA / 2900K / CRI 95

H: 600 mm / 24 in

Ø 85 mm / 3.3 in

LIV

12V / 1.5 W / 2.5 VA / 3750K / CRI 95

H: 612 mm / 24.1 in

Ø 67 mm / 2.6 in

LIV LOW

12V / 1.5 W / 2.5 VA / 3750K / CRI 95

H: 372 mm / 14.6 in

Ø 67 mm / 2.6 in

DISC

12V / 3.0 W / 4.9 VA / 2900K / CRI 98

H: 600 mm / 23.6 in

Ø 200 mm / 7.8 in

DISC LOW

12V / 3.0 W / 4.9 VA / 2900K / CRI 98

H: 350 mm / 13.7 in

Ø 200 mm / 7.8 in

WALL & UNDERCAP LIGHTS

ACE DOWN

12V / 3.0 W / 5.3 VA / 3000K / CRI 91

64 mm x 95 mm x 100 mm (LxWxH)

2.5 in x 3.7 in x 3.9 in (LxWxH)

ACE UP-DOWN

12V / 6.5 W / 10.3 VA / 3000K / CRI 92

64 mm x 95 mm x 120 mm (LxWxH)

2.5 in x 3.7 in x 4.7 in (LxWxH)

EVO HYDE 180

12V / 0.5 W / 0.6 VA / 3000K / CRI 95

180 mm x 16 mm x 22 mm (LxWxH)

7.0 in x 0.6 in x 0.8 in (LxWxH)

EVO HYDE 550

12V / 2.0 W / 2.1 VA / 3000K / CRI 96

556 mm x 16 mm x 22 mm (LxWxH)

21.8 in x 0.6 in x 0.8 in (LxWxH)

HALO DOWN

12V / 3.0 W / 5.0 VA / 3000K / CRI 92

H: 100 mm / 3.9 in

Ø 100 mm / 3.9 in

MINI WEDGE DARK

12V / 0.6 W / 0.6 VA / 2800K / CRI 95

60 mm x 35 mm x 50 mm (LxWxH)

2.3 in x 1.3 in x 1.9 in (LxWxH)

WEDGE SLIM

12V / 1.0 W / 1.0 VA / 2800K / CRI 96

200 mm x 35 mm x 50 mm (LxWxH)

7.8 in x 1.3 in x 1.9 in (LxWxH)

BLINK

12V / 1.0 W / 1.7 VA / 2800K / CRI 95

W: 48 mm / 1.8 in

Ø 100 mm / 3.9 in

View the entire in-lite collection

SYSTEM & ACCESSORIES

HUB 50

Touchscreen transformer

Max. installation value: 50 VA

HUB 100

Touchscreen transformer

Max. installation value: 100 VA

SMART HUB-150

SMART transformer (in-lite app)

Max. installation value: 150 VA

CBL-40 14/2

Low-voltage 14/2 cable

40 m / 132 ft

CBL-75 12/2

Low-voltage 12/2 cable

75 m / 246 ft

SPLITTER

Cable splitter for fixtures and light sensors

CC-2

Cable branch connector

CBL-EXT CORD

Fixture lead extension cable

1 m (3 ft) / 2 m (6 ft) / 3 m (9 ft)

MOVE

Wired motion detector for HUB 50 and HUB 100

SMART MOVE

Wireless motion detector for SMART HUB-150

PROTECTOR

Protect HUB 50, HUB 100, and SMART HUB-150 from harsh weather conditions

SPIKE / SPIKE 22

Install recessed fixtures in soft ground / 60 mm x 22 mm

RISER 2

Adjustable accessory to raise spotlights above plants / 35 cm - 53 cm (13.7 in - 20.9 in)

SHUTTER 1

Adjust light angle of ACE (UP) DOWN & HALO (UP) DOWN

WINK

Lens cover to prevent glare on ACE bollard fixtures



VIEW THE FULL IN-LITE COLLECTION

FOLLOW US ON SOCIAL MEDIA

**INSTAGRAM
&
FACEBOOK**

@INLITEDESIGN

**YOUTUBE
&
LINKEDIN**

IN-LITE OUTDOOR LIGHTING

in-lite®