
## **Premier**<sup>™</sup> 8 Retaining Wall Block



**Premier 8** is one of the most innovative SRW products the industry has seen in its 30 year history. Its unique and patented 1 sq. ft. block design is changing the industry. Premier's 54 lb. unit weight reduces installer fatigue and beats all other block systems for strength, performance, freight efficiencies and ease of construction.



Appearance Dependability Efficiency

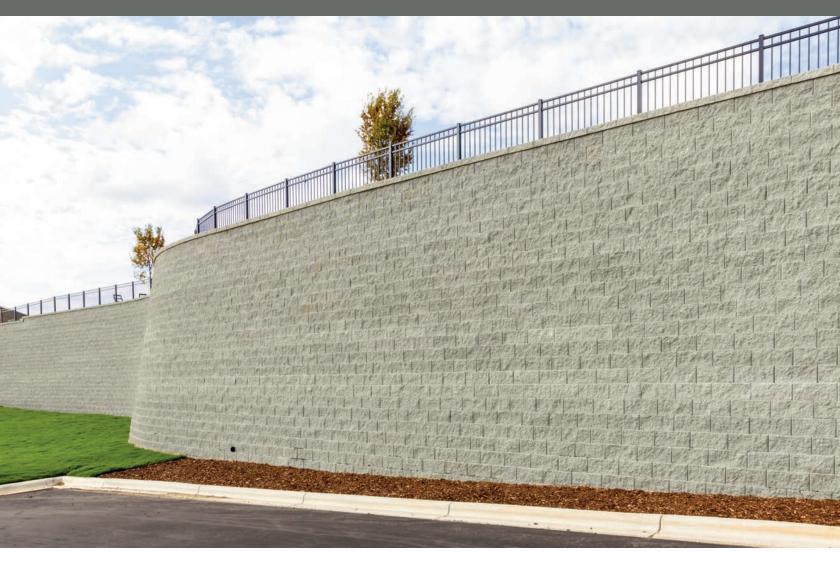

www.rockwoodwalls.com

Premier<sup>™</sup> 8 Retaining Wall Block



## Pound for pound, Premier 8 is unlike any other SRW block.


Premier 8's revolutionary block design makes it the most efficient 1 sq. ft. SRW block ever. At just 54 lbs., it beats all other block systems for freight efficiencies and ease of construction.

## Features and specifications:

- Easy to handle for increased efficiencies in the field
- No cumbersome/expensive pins or clips
- Capable of tight radius turns
- Allows for up to 864 sq. ft. per truckload

ım)

Manufactured in accordance with ASTM C1372. Unit availability, color and specifications vary by manufacturer. Contact your nearest Rockwood manufacturer or dealer for more information. Premier's straight-thru cores fill easily with drainage material that create "vertical stone columns" to increase grid connection strength and resistance to shear.





325 Alliance Place NE Rochester, MN 55906

*phone:* (507) 529-2871 *fax:* (507) 529-2879 www.rockwoodwalls.com

©2023 Rockwood Retaining Walls, Inc. All Rights Reserved. Made worldwide under license from Rockwood Retaining Walls, Inc. US and international patents issued and pending. This information has been prepared for the benefit of customers interested in Rockwood Retaining Walls custo. It was reviewed carefully prior to publication. Rockwood assumes no liability for its accurcy or completenses. Find determination of the suitability of any information or material for the use contemplated, or for its mamer of use, is the sale responsibility of the user. Rockwood Retaining Walls reserves the right to change product specifications at any time without incurring bilgations. 223

Available at:	