




# COMPACT LOADERS & ATTACHMENTS

## PRODUCT RANGE

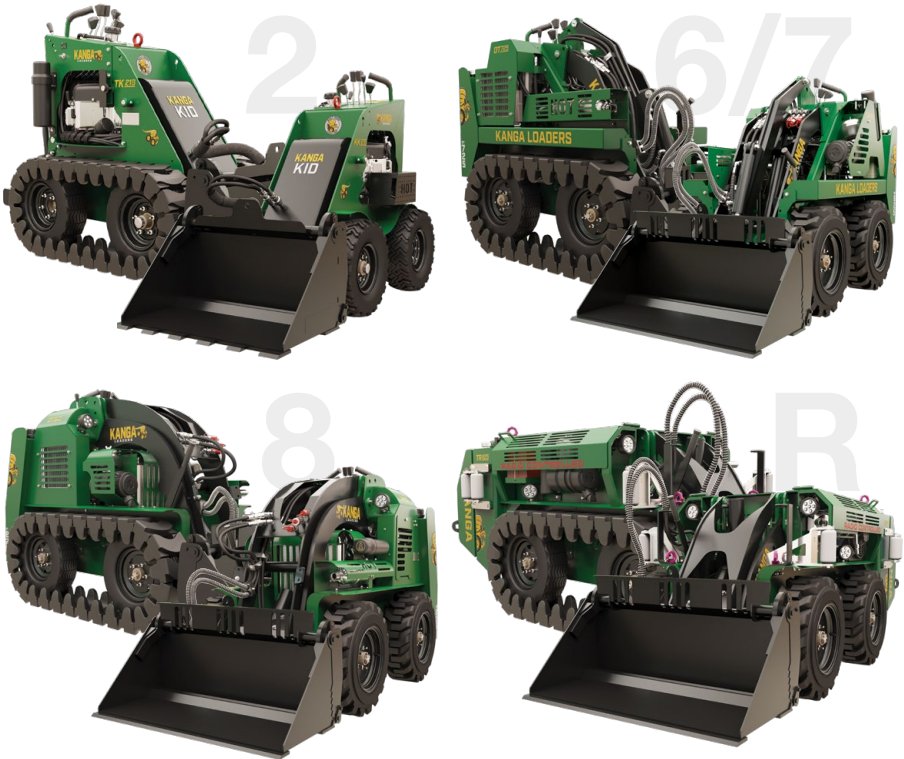

BUILT TOUGH SINCE 1981

# ATTACHMENTS

**THERE IS A VAST SELECTION OF ATTACHMENTS AVAILABLE FOR KANGA MINI LOADERS, TO SUIT MANY APPLICATIONS AND INDUSTRIES.**

*Kanga Loaders offers quality parts, quality manufacturing and the most stringent quality control. With readily available parts and local support, you will have less downtime and increased productivity. **Go online now to read more!***

**4-IN-1 BUCKETS**



**TRENCHERS**



**ROTARY TILLER**



**POWER HEADS**



**CARRYALL LEVELLER**



**AUGER BITS**



**Also available:** Mulch Buckets, Rubble Buckets, Grapple Buckets, Front Hoes, Hoe Buckets, Rock Grab, Mixer Bowls, Lawn Aerator, Rotating Log Grab, Mini Soil Conditioner, Multi-Tool Carrier for pallet forks or tow hitch.. plus more!

## SELF LEVELLING BUCKET WITH GENEROUS BUCKET ROLLBACK

Self-leveling helps maximize bucket capacity, and reduce spillage while raising and lowering of the boom. This ensures safer, faster, and easier operation of the bucket.

## AUTO AUXILIARY CUT-OUT

The auxiliary attachment flow becomes redundant when there is no operator standing on the platform. If the operator moves off the platform, the hydraulic power will automatically shut down.

## LONG-LIFE LINKAGE PINS

Greasable pins with hardened steel bushes.

## 5" DONALDSON PRE-AIR CLEANER FILTER STANDARD INCLUSION

A Donaldson filter with a full-view plastic bowl catches dust before it reaches the engine - An industry best practice (diesel motors only).

## RUPTURE RESISTANT FUEL TANKS

Twin long range heavy gauge steel fuel tanks allow up to 10 hours operation. Work a whole day without the hassle of refueling.

## FOUR ENCLOSED HIGH TORQUE HYDRAULIC WHEEL MOTORS

Four high torque hydraulic wheel motors deliver effective performance when breaking ground and trenching. The enclosed motors prevent motor damage, yet are easily accessible.

## ERGONOMIC HAND CONTROLS

Raised controls reduce operator reach and fatigue, while the responsive soft-touch controls offer improved controlled steering, and attachment operation.

# 2 SERIES

## GAS - WHEEL/TRACK



PERFORMANCE	TRACKED - TK216V		WHEELED - KK216V	
Tipping load with no bucket <sup>1</sup>	729 lbs	331 kg	742 lbs	337 kg
Rated operating capacity (ROC) with no bucket <sup>1</sup>	328 lbs	149 kg	371 lbs	169 kg
Travel speed	3.4 m/h	5.4 km/h	3.4 m/h	5.4 km/h
Fuel capacity	1.85 gal	7 L	1.85 gal	7 L
Fuel type	GAS		GAS	
Machine weight with no operator / bucket <sup>2</sup>	1041 lbs	472 kg	979 lbs	444 kg
ENGINE				
Manufacturer	Vanguard 305777		Vanguard 305777	
Gross power rating <sup>3</sup>	29 cu.in	11.8 kW	29 cu.in	11.8 kW
DRIVE SYSTEM				
Drive control	Soft touch hand levers		Soft touch hand levers	
Throttle control	Hand levers		Hand levers	
Tracks/Wheels with direct drive hydraulic motors	Tracked		Wheeled	
HYDRAULICS				
Gear pump displacement	0.488 cu.in/rev	8 cc/rev	0.488 cu.in/rev	8 cc/rev
Pump output	6.3 gpm	24 lpm	6.3 gpm	24 lpm
System pressure	2700 psi	186 bar	2700 psi	186 bar
Hydraulic reservoir capacity	13.6 gal	51.5 L	13.6 gal	51.5 L
KANGA BUCKETS				
Standard bucket capacity (heaped / struck volume) <sup>4</sup>	2.72 cu ft / 2.08 cu ft (0.077 m <sup>3</sup> / 0.059 m <sup>3</sup> )			
4in1 bucket capacity (heaped / struck volume) <sup>4</sup>	2.97 cu ft / 2.23 cu ft (0.084 m <sup>3</sup> / 0.063 m <sup>3</sup> )			
DIMENSIONS				
<b>A</b> Maximum operating height with bucket	62.2"	1580 mm	61.8"	1570 mm
<b>B</b> Height to hinge pin	46.7"	1185 mm	46.3"	1175 mm
<b>C</b> Overall height	47.6"	1210 mm	47.2"	1200 mm
<b>D</b> Overall length with bucket	81.5"	2070 mm	81.5"	2070 mm
<b>E</b> Overall track / wheel width	32.3"	800 mm	30.3"	770 mm
<b>F</b> Bucket horizontal reach at 57° (arms up)	13.4"	340 mm	13.4"	340 mm
Bucket horizontal reach (arms level)	33.1"	840 mm	33.5"	850 mm
<b>G</b> Dump height Std. bucket	23.4"	595 mm	23"	585 mm
Dump height 4in1 bucket	46.7"	1185 mm	46.3"	1175 mm
<b>H</b> Bucket width	31.5"	800 mm	31.5"	800 mm
<b>I</b> Bucket maximum rollback	36°		36°	
<b>J</b> Bucket maximum dump angle	48°		48°	
<b>K</b> Ground penetration	17.1"	435 mm	17.5"	445 mm
<b>L</b> Overall length less bucket	61.4"	1560 mm	61.4"	1560 mm
<b>M</b> Ground clearance	6.3"	160 mm	5.9"	150 mm
<b>N</b> Angle of departure	17°		17°	
Approach angle with no bucket (and with bucket rolled back)	90° (32°)		90° (32°)	



**ENGINE WARRANTY**  
**3 YEARS/UNLIMITED**  
 Gas machines

**COMMERCIAL PRODUCT WARRANTY**  
**5 YEARS** Chassis structure.  
**2 YEARS/1,000 HOURS** Arm/tilt assembly workmanship and structure.  
**1 YEAR** Other components and electrical. Warranty Conditions Apply.

# 6 & 7 SERIES

## GAS/DIESEL - WHEEL/TRACK



PERFORMANCE	WHEELED - PW628		WHEELED - DW625		TRACKED - PT728		TRACKED - DT725	
Tipping load with no bucket <sup>1</sup>	955 lbs	434 kg	1054 lbs	479 kg	947 lbs	430 kg	1018 lbs	463 kg
Rated operating capacity (ROC) with no bucket <sup>1</sup>	478 lbs	217 kg	527 lbs	239 kg	426 lbs	194 kg	458 lbs	208 kg
Travel speed	4.3 m/h	7 km/h	4.3 m/h	7 km/h	4.3 m/h	7 km/h	4.3 m/h	7 km/h
Fuel capacity (EPA compliant)	11.8 gal	45 L	13.2 gal	50 L	11.8 gal	45 L	13.2 gal	50 L
Fuel type	GAS		DIESEL		GAS		DIESEL	
Machine weight with no operator / bucket <sup>2</sup>	1965 lbs	893 kg	2130 lbs	968 kg	1899 lbs	863 kg	2075 lbs	943 kg
ENGINE	Honda GX690		Kubota D902		Honda GX690		Kubota D902	
Manufacturer	Honda GX690		Kubota D902		Honda GX690		Kubota D902	
Net power rating <sup>3</sup>	42 cu.in	16.5 kW	23.5 hp	17.5 kW	42 cu.in	16.5 kW	23.5 hp	17.5 kW
Max torque	35.65 ft lbs	48.34 Nm	41.3 ft lbs	56 Nm	35.65 ft lbs	48.34 Nm	41.3 ft lbs	56 Nm
DRIVE SYSTEM	Soft touch hand levers		Soft touch hand levers		Soft touch hand levers		Soft touch hand levers	
Drive control	Soft touch hand levers		Soft touch hand levers		Soft touch hand levers		Soft touch hand levers	
Throttle control	Hand levers		Hand levers		Hand levers		Hand levers	
Wheels w. direct drive hydraulic motors	Wheeled		Wheeled		Tracked		Tracked	
Tires	23" Lug Tires		23" Lug Tires		N/A		N/A	
HYDRAULICS	0.69 cu.in/rev		0.69 cu.in/rev		0.69 cu.in/rev		0.69 cu.in/rev	
Gear pump displacement	0.69 cu.in/rev	11.3 cc/rev	0.69 cu.in/rev	11.3 cc/rev	0.69 cu.in/rev	11.3 cc/rev	0.69 cu.in/rev	11.3 cc/rev
Pump output	10.75 gpm	41 lpm	10.75 gpm	41 lpm	10.75 gpm	41 lpm	10.75 gpm	41 lpm
System pressure	3000 psi	207 bar	3200 psi	220 bar	3000 psi	207 bar	3200 psi	220 bar
Hydraulic reservoir capacity	17.4 gal	66 L	17.4 gal	66 L	17.4 gal	66 L	17.4 gal	66 L
KANGA BUCKETS	4.24 cu ft / 3.21 cu ft (0.12 m <sup>3</sup> / 0.09 m <sup>3</sup> )		4.24 cu ft / 3.21 cu ft (0.12 m <sup>3</sup> / 0.09 m <sup>3</sup> )		4.24 cu ft / 3.21 cu ft (0.12 m <sup>3</sup> / 0.09 m <sup>3</sup> )		4.24 cu ft / 3.21 cu ft (0.12 m <sup>3</sup> / 0.09 m <sup>3</sup> )	
Standard bucket capacity (heaped / struck volume) <sup>4</sup>	4.24 cu ft / 3.21 cu ft (0.12 m <sup>3</sup> / 0.09 m <sup>3</sup> )				4.24 cu ft / 3.21 cu ft (0.12 m <sup>3</sup> / 0.09 m <sup>3</sup> )			
4in1 bucket capacity (heaped / struck volume) <sup>4</sup>	4.17 cu ft / 3.25 cu ft (0.118 m <sup>3</sup> / 0.092 m <sup>3</sup> )				4.17 cu ft / 3.25 cu ft (0.118 m <sup>3</sup> / 0.092 m <sup>3</sup> )			
DIMENSIONS	98.8"		98.8"		98.8"		98.8"	
A Max. operating height with bucket	98.8"	2510 mm	98.8"	2510 mm	98.8"	2515 mm	98.8"	2515 mm
B Height to hinge pin	73.4"	1865 mm	73.4"	1865 mm	73.6"	1870 mm	73.6"	1870 mm
C Overall height	53.9"	1370 mm	53.9"	1370 mm	53.5"	1360 mm	53.5"	1360 mm
D Overall length with bucket	86.6"	2200 mm	86.6"	2200 mm	86.6"	2200 mm	86.6"	2200 mm
E Overall wheel width	40.6"	1030 mm	40.6"	1030 mm	40.9"	1040 mm	40.9"	1040 mm
F Bucket reach at 40° (arms up)	16.1"	410 mm	16.1"	410 mm	16.1"	410 mm	16.1"	410 mm
Bucket maximum reach (arms level - horizontal)	39.8"	1010 mm	39.8"	1010 mm	39.8"	1010 mm	39.8"	1010 mm
G Dump height Std. bucket	44.1"	1120 mm	44.1"	1120 mm	44.1"	1120 mm	44.1"	1120 mm
Dump height 4in1 bucket	73"	1855 mm	73"	1855 mm	73.4"	1865 mm	73.4"	1865 mm
H Bucket width	42.1"	1070 mm	42.1"	1070 mm	42.1"	1070 mm	42.1"	1070 mm
I Bucket maximum rollback	30°		30°		30°		30°	
J Bucket maximum dump angle	60°		60°		60°		60°	
K Ground penetration	16.1"	410 mm	16.1"	410 mm	16.1"	410 mm	16.1"	410 mm
L Overall length less bucket	65.4"	1660 mm	65.4"	1660 mm	65.4"	1660 mm	65.4"	1660 mm
M Ground clearance	7.3"	185 mm	7.3"	185 mm	7.7"	195 mm	7.7"	195 mm
N Angle of departure	30°		30°		30°		30°	
Approach angle with no bucket (and with bucket rolled back)	90° (50°)		90° (50°)		90° (50°)		90° (50°)	



### ENGINE WARRANTY

**3 YEARS/UNLIMITED**

Gas machines

**2 YEARS/UNLIMITED**

Diesel machines

### COMMERCIAL PRODUCT WARRANTY

**5 YEARS**

**2 YEARS/1,000 HOURS**

**1 YEAR**

Chassis structure.


Arm/tilt assembly workmanship and structure.

Other components and electrical. Warranty Conditions Apply.

<sup>1</sup>Tipping load and Rated Operating Capacity (ROC) have been determined to ISO 14397-1. This is to represent general loader capabilities, and cannot be used for material load without adjusting for the specific attachment. <sup>2</sup>Machine Weight is calculated with no operator, using no bucket, full fuel tanks, and air-filled tires. <sup>3</sup>Power Rating is the net power of the production engine, only as measured in accordance with SAE J1349 at 3600 RPM. Mass production engines vary from this value. Actual power output for the engine installed in the delivered machine may vary, depending on numerous factors. These factors can include engine operation in the application, environmental conditions, and other variables. <sup>4</sup>Volumes based on ISO 7546:1993.

# 8 SERIES

## DIESEL - WHEEL/TRACK

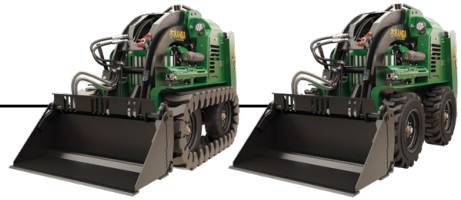

PERFORMANCE	DIESEL - DT825		DIESEL - DW825	
Tipping load with no bucket <sup>1</sup>	1210 lbs	550 kg	1182 lbs	537 kg
Rated operating capacity (ROC) with no bucket <sup>1</sup>	544 lbs	247 kg	591 lbs	267 kg
Travel speed - default mode (and fast mode)	3.4 m/h (5.8 m/h)	5.4 km/h(9.3)	4.3 m/h	7 km/h
Fuel capacity	10.5 gal	40 L	10.5 gal	40 L
Fuel type	DIESEL		DIESEL	
Machine weight with no operator / bucket <sup>2</sup>	2203 lbs	999 kg	2089 lbs	948 kg
ENGINE	Kubota D902		Kubota D902	
Manufacturer	Kubota D902		Kubota D902	
Net power rating <sup>3</sup>	23.5 hp	17.5 kW	23.5 hp	17.5 kW
Max torque	41.3 ft lbs	56 Nm	41.3 ft lbs	56 Nm
DRIVE SYSTEM	Soft touch hand levers		Soft touch hand levers	
Drive control	Soft touch hand levers		Soft touch hand levers	
Throttle control	Hand levers		Hand levers	
Tracks/Wheels with direct drive hydraulic motors	Tracked		Wheeled	
Tires	23" Lug tires		23" Lug tires	
HYDRAULICS	0.69 cu.in/rev		0.69 cu.in/rev	
Gear pump displacement	0.69 cu.in/rev	11.3 cc/rev	0.69 cu.in/rev	11.3 cc/rev
Pump output	10.75 gpm	41 lpm	10.75 gpm	41 lpm
System pressure	3200 psi	220 bar	3200 psi	220 bar
Hydraulic reservoir capacity	24.3 gal	92 L	24.3 gal	92 L
KANGA BUCKETS	4.3 cu ft / 3.28 cu ft (0.122 m <sup>3</sup> / 0.093 m <sup>3</sup> )		4.3 cu ft / 3.28 cu ft (0.122 m <sup>3</sup> / 0.093 m <sup>3</sup> )	
HD Standard bucket capacity (heaped / struck volume) <sup>4</sup>	4.3 cu ft / 3.28 cu ft (0.122 m <sup>3</sup> / 0.093 m <sup>3</sup> )		4.3 cu ft / 3.28 cu ft (0.122 m <sup>3</sup> / 0.093 m <sup>3</sup> )	
HD 4in1 bucket capacity (heaped / struck volume) <sup>4</sup>	4.59 cu ft / 3.36 cu ft (0.13 m <sup>3</sup> / 0.095 m <sup>3</sup> )		4.59 cu ft / 3.36 cu ft (0.13 m <sup>3</sup> / 0.095 m <sup>3</sup> )	
DIMENSIONS	101.2"		101.0"	
<b>A</b> Maximum operating height with bucket	101.2"	2570 mm	101.0"	2565 mm
<b>B</b> Height to hinge pin	79.9"	2030 mm	79.7"	2025 mm
<b>C</b> Overall height	55.4"	1407 mm	55.1"	1402 mm
<b>D</b> Overall length with bucket	87.8"	2230 mm	87.8"	2230 mm
<b>E</b> Overall wheel width	41.1"	1044 mm	40.7"	1033 mm
<b>F</b> Bucket reach at 57° (arms up)	7.8"	200 mm	7.8"	200 mm
Bucket maximum reach (arms level - horizontal)	26.4"	673 mm	26.4"	673 mm
<b>G</b> Dump height with GP bucket	55.1"	1400 mm	54.9"	1395 mm
Dump height with 4in1 bucket	81.9"	2080 mm	81.7"	2075 mm
<b>H</b> Bucket width	42.9"	1090 mm	42.9"	1090 mm
<b>I</b> Bucket maximum rollback	41°		41°	
<b>J</b> Bucket maximum dump angle	57°		57°	
<b>K</b> Ground penetration	19.6"	498 mm	19.6"	498 mm
<b>L</b> Overall length less bucket	67.7"	1720 mm	67.7"	1720 mm
<b>M</b> Ground clearance	7.6"	194 mm	7.6"	194 mm
<b>N</b> Angle of departure	37°		37°	
Approach angle with no bucket (and with bucket rolled back)	90° (29°)		90° (28°)	



### ENGINE WARRANTY

**2 YEARS/UNLIMITED**

Diesel machines

### COMMERCIAL PRODUCT WARRANTY

**5 YEARS**

**2 YEARS/1,000 HOURS**

**1 YEAR**

Chassis structure.


Arm/tilt assembly workmanship and structure.

Other components and electrical. Warranty Conditions Apply.

## SPECIFICATIONS

# REMOTE SERIES

## DIESEL - WHEEL/TRACK

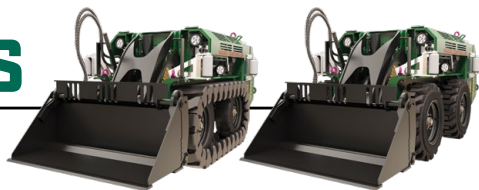

TRANSMITTER BATTERY	REMOTE CONTROL	
Power supply (battery MBM06MH)	NiMH 7.2 V	
Antenna	Internal	
Housing material	PA 6 (20% fg)	
Protection degree	IP65	
Dimensions	12.2" x 8.3" x 7.5"	310 mm x 210 mm x 190 mm
Run time (at 68°F/20°C)	11 h	
Run time with data feedback (at 68°F/20°C)	9.5 h	
Run time with low power (at 68°F/20°C)	14 h	
Run time with data feedback and low power (at 68°F/20°C)	12.5 h	

### PERFORMANCE LEVEL OF SAFETY FUNCTIONS ACCORDING TO EN ISO 13849-1

STOP Protection	PL e (4-wire wiring)
STOP Protection	PL e (2-wire wiring)
Protection against unintended movement from standstill position	PL d
Protection Degree	IP65

### AC BATTERY CHARGER

Supply voltage	80-250 Vac (50/60 Hz)	
Maximum recharging time	4 h	
Recharging temperature range	41°F -113°F	+5°C - +45°C
Protection degree	IP40	

### DYNAMIC SERIES TECHNICAL DATA

Frequency band in dynamic mode	915 - 928 MHz	
Frequency band in static mode	915 - 928 MHz	
Transmitting power	Meets the requirements for free-license apparatus	
Available radio channels	260	
Available radio channels with static mode	260	
Channel spacing	50 kHz	
Hamming distance	> 15	
Probability of undetected error	< 10-15	
Typical working range	328ft	100m
Working range with low power function	100ft	30m
Command response time	80 - 130 ms	
Active stop cut-in time (typical)	< 80 ms	
Active stop cut-in time (maximum)	130 ms	
Passive stop cut-in time	0.5 / 1.2 / 2s	

PERFORMANCE	TRACKED - TR825		WHEELED - WR825	
Tipping load with no bucket <sup>1</sup>	1329 lbs	603 kg	1240 lbs	564 kg
Rated operating capacity (ROC) with no bucket <sup>1</sup>	595 lbs	270 kg	620 lbs	282 kg
Travel speed - default mode (and fast mode)	3.4 m/h (5.8 m/h)	5.4 km/h (9.3 km/h)	4.35 m/h	7 km/h
Fuel capacity	10 gal	38 L	10 gal	38 L
Fuel type	DIESEL		DIESEL	
Machine weight with no bucket <sup>2</sup>	2491 lbs	1130 kg	2271 lbs	1030 kg

### ENGINE

Manufacturer	Kubota D902		Kubota D902	
Power rating <sup>3</sup>	23.5 hp	17.5 kW	23.5 hp	17.5 kW
Max torque	41.3 ft lbs	56 Nm	41.3 ft lbs	56 Nm

### DRIVE SYSTEM

Throttle control	Remote	Remote
Tracks with direct drive hydraulic motors	Tracked	Wheeled

### HYDRAULICS

Gear pump displacement	0.69 cu.in/rev	11.3 cc/rev	0.69 cu.in/rev	11.3 cc/rev
Pump output	10.73gpm	40.6 lpm	10.73 gpm	40.6 lpm
System pressure	3200 psi	220 bar	3200 psi	220 bar
Hydraulic reservoir capacity	21.1 gal	80 L	21.1 gal	80 L

### KANGA BUCKETS

HD 4in1 bucket capacity (heaped / struck volume) <sup>4</sup>	4.59 cu ft / 3.36 cu ft (0.13 m <sup>3</sup> / 0.095 m <sup>3</sup> )
---	---

### DIMENSIONS

<b>A</b> Height to hinge pin	61.5"	1561 mm	61.25"	1556 mm
<b>B</b> Overall height with no warning lights	42"	1066 mm	41.77"	1061 mm
<b>C</b> Overall length with HD 4in1 bucket	103.3"	2624 mm	103.39"	2626 mm
<b>D</b> Overall track width	41.2"	1046 mm	39.69"	1008 mm
<b>E</b> HD 4in1 bucket width	42.9"	1090 mm	42.91"	1090 mm
<b>F</b> Ground clearance	7.2"	184 mm	7.05"	179 mm



### ENGINE WARRANTY

**2 YEARS/UNLIMITED**  
Diesel engine covered under the manufacturer's warranty.

### COMMERCIAL PRODUCT WARRANTY


**5 YEARS**  
**2 YEARS/1,000 HOURS**  
**1 YEAR**

Chassis structure.  
Arm/tilt assembly workmanship and structure.  
Other components and electrical. Warranty Conditions Apply.

<sup>1</sup>Tipping load and Rated Operating Capacity (ROC) have been determined to ISO 14397-1. This is to represent general loader capabilities, and cannot be used for material load without adjusting for the specific attachment. <sup>2</sup>Machine Weight is calculated with no operator, using no bucket, full fuel tanks, and air-filled tires. <sup>3</sup>Power Rating is the net power of the production engine, only as measured in accordance with SAE J1349 at 3600 RPM. Mass production engines vary from this value. Actual power output for the engine installed in the delivered machine may vary, depending on numerous factors. These factors can include engine operation in the application, environmental conditions, and other variables. <sup>4</sup>Volumes based on ISO 7546:1983.

# ENGINEERED TO PERFORM WITH MINIMAL MAINTENANCE. BUILT TO LAST.


- ✔ Kanga's compact wheel hub design has zero overhang. Unlike competing brands, the wheel load is placed directly over the bearings, ensuring a longer service life.
- ✔ A zero overhang helps protect against seal damage from stringy weeds, stringy bark, mulch, and other entanglement, preventing unnecessary maintenance and premature seal failures.
- ✔ Our wheel motors are simple to service and replace.

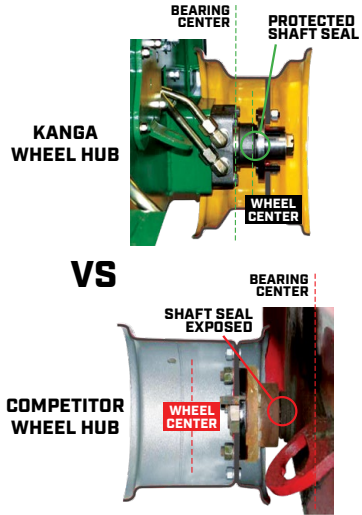

## PUNCTURE-PROOF YOUR TYRES

Kanga Loaders offers a puncture-proof tyre system for your loader. The puncture-proof tyre system is a resealing substance which is pumped into the tyre through the valve stem, and remains liquid for the life of the mounted tyre. As the wheel rotates, centrifugal forces

spread the liquid evenly over the interior tyre lining. If the tyre is punctured, thousands of strong interlocking 'reseal' fibres clot in and around the puncture to prevent any loss of air, forming a seal. *Available from your Dealer.*



**ANTI-  
PUNCTURE  
TYRE  
RESEALING  
SYSTEM**



# MULTI-TASKING MADE EASY



*Cut, drill, dig, lift, level, carry, clean...*  
Kanga Loaders versatile attachments can be used in a variety of industries, including earthmoving, construction, landscaping, forestry, fencing, farming, civil works, road maintenance, mining, geotechnical, warehousing, and more.

Kanga Loaders attachments are labour-saving devices designed to enhance the versatility and profitability of Kanga Loaders Mini Loaders. Our extensive range of quality attachments are 100% Australian designed and manufactured.



1978



The original idea which led to the world's first stand-on machine, was originally a motorised wheelbarrow.

1980



By 1980, the concept developed into a walk-behind machine with similar design and styling characteristics, found on modern machines.

1981



The first stand-on machine was introduced to the world. Named the Riga'l Universal Loader, it was powered by an 11hp motor.

1984



The loaders were renamed the Jaden Loader. A larger sized model was released, named the Dingo 1000.

1985



The Jaden Maxi prototype was powered by a 16hp Engine. Only 35 were ever made.

1999



The 5 Series model saw an introduction to soft-touch controls, auxiliary cutout, and redesigned fuel tanks, in preparation for the introduction of tracks.

2000



The 2 Series was released, to align with the original concept of a tight access and affordable earthmoving solution.

2002



The Kid track mini loader was released, as the smallest tracked machine in the world.

2003



6 & 7 Series mini loaders were released. Originally named the Big Foot, due to its 12" wheels, available in a 24hp petrol, or 20hp Diesel engine. The Track machine was named Fat Track.

2006



A new 25hp 2-speed 8 Series loader, featuring an oil cooler, trenching valve, and auto quick-hitch release - The largest and most powerful in the range.

2013



The Kanga 8 Series range, featuring a 25hp diesel motor, was released. Available in wheeled and tracked versions.

2015



Kanga release the Kanga Klean program as an industry-first in emissions reduction.

2016



Kanga release the DT835 as the most powerful Kanga mini loader.

2017



Kanga Loaders launches in North America - USA.

2021



Kanga Loaders celebrates its 40th year anniversary.

DESIGN - STRENGTH - EASE OF OPERATION - VALUE

1986



Mk1 - A major chassis design revision was undertaken to increase power and improve poise & balance.

1988



Long range fuel tanks were added over the wheels. Power was increased to 16hp.

1989



3 Series - Optional 10" wheels, larger fuel tanks (which encapsulate the operator), and the iconic green colour were introduced. Received 'Australian International Design' Award.

1996



4 Series - First model with 10" wheels as standard. Petrol and Diesel model options became available.

1997



Kanga begins exports to North America and New Zealand.

2007



6 & 7 Series upgraded to 4-wheel motors, a wider platform, and an increase of performance and comfort. Received 'Innovative Product of the Year' Award.

2008



Remote Loader commences development, and first prototype released.

2009



Kanga Loaders was acquired by Digga Australia. The manufacturing of loaders was moved into the Digga factory.

2010



The Kanga Warrior was released. A cost effective bare-bones model for the weekend warrior.

2011



The Kanga Remote Loader was released, with wheeled and track versions available.

2022



Logo and machine branding modernised.

# KANGA LOADERS

## MULTI-TASKING MADE EASY

Since being established in 1978 as Jaden Engineering, the Kanga loader has been a source of innovation for the multi-task compact skid steer market. Upholding the highest safety industry standards, starting with the original idea and prototype in 1980, Kanga later developed the first production model in 1981. Kanga Loaders has since become an Australian household name within the mini loader industry.



**TURNING HARD WORK  
INTO EASY BUSINESS  
SINCE 1981**

**PHONE** 833 30KANGA

**EMAIL** [infous@kangaloader.com](mailto:infous@kangaloader.com)



**@kangaloadersusa**

*Kanga Loaders North America  
Dyersville, Iowa*

**kangaloaderusa.com**