

DEJANA[®]
Truck and Utility Equipment

***dyna*/PRO**

*Dump Bodies Designed and Tested for
Superior Strength & Performance*



BODY SPECIFICATIONS

(a) ASTM A572 GR50 Alloy Steel for Superior Strength and Corrosion Resistance

(b) Black Semi-gloss Powdercoat

- Engineered and tested to be one of the most durable finishes available.
 - Gravelometer chip resistance test
 - Direct and reverse impact test
 - Salt spray/ corrosion resistance test

(c) Cross-memberless Understructure with Enclosed 10-ga. Trapezoidal Longsills

- Fully welded to unify body structure and provide superior strength
- Sleek, design with no salt pockets

(d) Tubular Sidewall Construction

- 10 ga. inner & 12ga. outer wall interlaced with floor and underbody for superior strength & rigidity

(e) Scissor Lift & Sub-Frame

- Double acting heavy-duty hoist
- Redesigned subframe to eliminate welded joints
- Mounting brackets: sub-frame to chassis

(f) Rear Hinge



- .250" plates with .375" doublers on outside of clevis
- 1" OD zinc plated pin with cotter pin

(g) Slide Lock Upper Tailgate Latch

- 2-point latching system with ergonomic design to maximize leverage and Improve serviceability
- Built-in tarp bar retention hooks

(h) New Ergonomic Hand-held Controller

- Single or dual functionality (dump & plow)

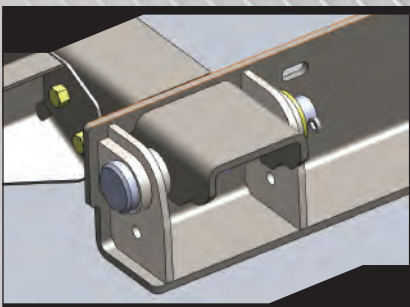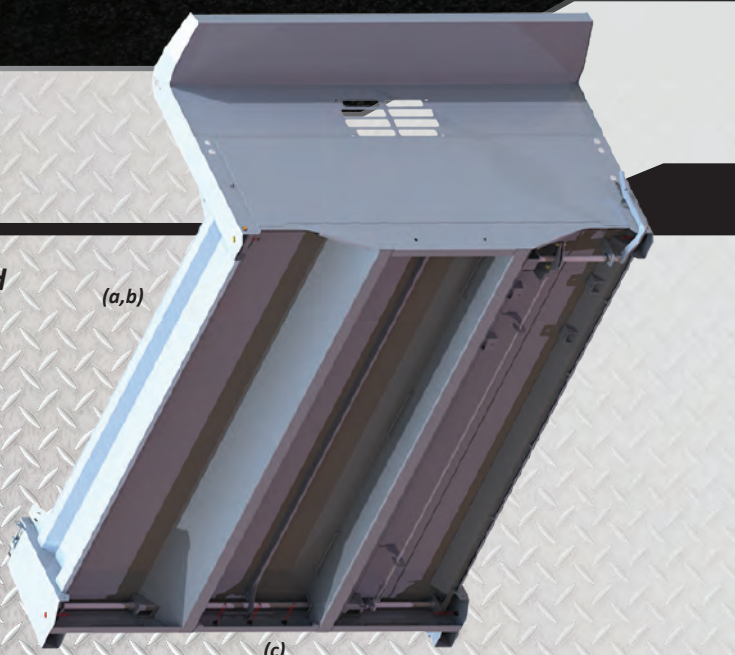

FIXED SIDE



Mild Steel Fixed Side Dump Body										
Part #	Length	Side Height	Side Walls	Floor Options	Headsheet	Double-wall Tailgate	Rear Opening Width	Max Capacity	Approx. Weight*	Hoist Capacity
DPD-MS-FX9	9'	12"	12-GA. Double Wall	10- or 7-GA. GR50	12-GA. GR50	10-GA. Inside/ 12-GA. Outside	85.7"	2-3 CU. Yds.	1,411 Lbs.	11.4 Tons
		16"						3-4 CU. Yds.	1,477 Lbs.	
DPD-MS-FX11	11'	12"						2-3 CU. Yds.	1,595 Lbs.	9.2 Tons
		16"						3-4 CU. Yds.	1,684 Lbs.	

Stainless Steel Fixed Side Dump Body										
Part #	Length	Side Height	Side Walls	Floor Options	Headsheet	Double-wall Tailgate	Rear Opening Width	Max Capacity	Approx. Weight*	Hoist Capacity
DPD-SS-FX9	9'	12"	12-GA. Double Wall	10-GA. 304 SS or 3/16" AR400	12-GA. GR50	10-GA. Inside/ 12-GA. Outside	85.7"	2-3 CU. Yds.	1,411 Lbs.	11.4 Tons
		16"						3-4 CU. Yds.	1,477 Lbs.	
DPD-SS-FX11	11'	12"						2-3 CU. Yds.	1,595 Lbs.	9.2 Tons
		16"						3-4 CU. Yds.	1,684 Lbs.	

FOLD-DOWN




Mild Steel Fold-down Side Dump Body										
Part #	Length	Side Height	Side Walls	Floor Options	Headsheet	Double-wall Tailgate	Rear Opening Width	Max Capacity	Approx. Weight*	Hoist Capacity
DPD-MS-FD9	9'	12"	12-GA. Single Wall	10- or 7-GA. GR50	12-GA. GR50	10-GA. Inside/ 12-GA. Outside	85.7"	2-3 CU. Yds.	1,386 Lbs.	11.4 Tons
		16"						3-4 CU. Yds.	1,429 Lbs.	
DPD-MS-FD11	11'	12"						2-3 CU. Yds.	1,539 Lbs.	9.2 Tons
		16"						3-4 CU. Yds.	1,602 Lbs.	

Stainless Steel Fold-down Side Dump Body										
Part #	Length	Side Height	Side Walls	Floor Options	Headsheet	Double-wall Tailgate	Rear Opening Width	Max Capacity	Approx. Weight*	Hoist Capacity
DPD-SS-FD9	9'	12"	12-GA. Single Wall	10-GA. 304 SS or 3/16" AR400	12-GA. GR50	10-GA. Inside/ 12-GA. Outside	85.7"	2-3 CU. Yds.	1,386 Lbs.	11.4 Tons
		16"						3-4 CU. Yds.	1,429 Lbs.	
DPD-SS-FD11	11'	12"						2-3 CU. Yds.	1,539 Lbs.	9.2 Tons
		16"						3-4 CU. Yds.	1,602 Lbs.	




MODULAR CAB SHIELD OPTIONS

Easy Replacement and Configurable with Strobe Options

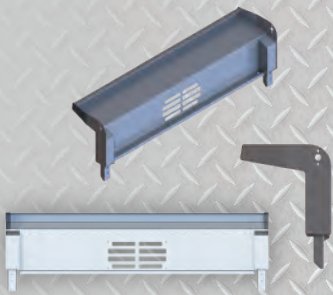

Standard Height Quarter Cab Shield

14.9" Overhang/ 17" Clearance
21" x 9.6" window area
139 lbs.



Standard Height Half Cab Shield

21.8" Overhang/ 18" Clearance
21" x 9.6" window area
159 lbs.



Mid-Height Quarter Cab Shield

14.3" Overhang/ 20.6-23" Clearance
21" x 9.6" window area
161 lbs.



Tall-Height Quarter Cab Shield

14.3" Overhang/ 24.6-27" Clearance
21" x 9.6" window area
176 lbs.

OPTIONS & ACCESSORIES

- Pull-out ladder (powder coated or stainless steel)
- Asphalt apron
- Coal chute tailgate
- Toolboxes
- Cab shield lights
- 6" side board pockets
- Dejana mudflaps
- Tarp
- Pintle plate w/ D-rings
- 7-Pin trailer plug end
- Back up alarm
- Body up switch/ light
- Brake controller
- Reflective tape and more...

